

**PCT**

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification 6 : <b>H02K 19/26, 19/36</b></p>	<b>A1</b>	<p>(11) International Publication Number: <b>WO 99/17432</b></p> <p>(43) International Publication Date: 8 April 1999 (08.04.99)</p>
<p>(21) International Application Number: PCT/SE98/01741</p> <p>(22) International Filing Date: 29 September 1998 (29.09.98)</p> <p>(30) Priority Data: 9703555-4      30 September 1997 (30.09.97)      SE</p> <p>(71) Applicant (for all designated States except US): ASEA BROWN BOVERI AB [SE/SE]; S-721 83 Västerås (SE).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): SÖRENSEN, Erlend [SE/SE]; Gudruns väg 32, S-723 55 Västerås (SE). LEIJON, Mats [SE/SE]; Hyvrlargatan 5, S-723 35 Västerås (SE).</p> <p>(74) Agent: HOPFGARTEN, Nils; L.A. Groth &amp; Co. KB, P.O. Box 6107, S-102 32 Stockholm (SE).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, ES, FI, FI (Utility model), GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> With international search report. In English translation (filed in Swedish).</p>
<p>(54) Title: A ROTARY ELECTRIC MACHINE</p>		
<p>(57) Abstract</p> <p>A rotary electric machine of alternating current type designed to be connected directly to a distribution or transmission network comprises at least one electric winding. The winding comprises at least one electric conductor, a first layer with semi-conducting properties surrounding the conductor, a solid insulating layer surrounding the first layer and a second layer with semi-conducting properties surrounding the insulating layer. A brushless excitation system, switchable between positive and negative excitation, is also arranged for excitation of the machine. An electric power plant comprises such a rotary electric machine. In a method of exciting a rotary electric machine with both positive and negative excitation current direction, a two-way field over-voltage protection means (8, 10, 12, 14) or a two-way discharge circuit is connected temporarily across the field winding (4) of the machine.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BR	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## A ROTARY ELECTRIC MACHINE

### Technical field

The present invention relates to a rotary electric machine of alternating current  
5 type designed to be connected directly to a distribution or transmission network  
and comprising at least one electric winding. The invention also relates to an  
electric power plant comprising such an electric machine, and also to a method of  
exciting a rotary electric machine.

### 10 Background art

The rotary electric machine according to the invention may be a synchronous ma-  
chine, dual-fed machine, external pole machine or synchronous flow machine.

To connect machines of this type to distribution or transmission networks, in the  
15 following referred to as power networks, transformers have hitherto been used to  
step up the voltage to network level, i.e. to the range of 130-400 kV.

Generators having a rated voltage of up to 36 kV are described by Paul R. Siedler  
"36 kV Generators Arise from Insulation Research", Electrical World, 15 October  
20 1932, pages 524-527. These generators comprise windings of high-voltage cable  
in which the insulation is divided into different layers with different dielectric con-  
stants. The insulating material used consists of various combinations of the three  
components mica-foil mica, varnish and paper.

25 It has now been found that, by manufacturing the above-mentioned winding of the  
electric machine from an insulated electric high-voltage conductor with a solid in-  
sulation of a type similar to that used in cables for power transmission, the ma-  
chine voltage can be increased to such levels that the machine can be connected  
directly to any power network without the use of intermediate transformers. A  
30 typical operating range for these machines is 30 to 800 kV.

Nowadays static exciters or brushless exciters with rotating diode rectifier bridges  
are used in rotary electric machines. The excitation equipment is frequently re-  
quired to be able to produce a peak voltage and peak current of 1.5 to 3 times  
35 greater than equivalent magnitudes in the case of rated load excitation for the  
machine in question, for a duration of 10-30 seconds. The excitation equipment  
shall also be able to produce a field current equivalent to the rated load excitation  
current for 25% voltage on the stator terminal of the machine. The excitation  
system shall preferably be "maintenance free", i.e. an excitation system without

slip rings. The response and transient times at network disturbances shall also be rapid, i.e. the excitation equipment shall be able to generate both positive and negative field voltage. In the case of synchronous compensators, the excitation system shall generally be able to produce both positive and negative field current and demands for peak voltage factors greater than 3 times the rated load excitation voltage may occur.

Brushless exciters eliminate the problems of dirt from carbon dust from brushes and slip rings. However, brushless exciters in accordance with known technology exhibit poorer control performance than static exciters.

The object of the present invention is thus to provide a rotary electric machine that can be connected directly to a power network and that is provided with a "maintenance free" excitation system with improved control performance, and an electric power plant comprising such an electric machine, as well as to propose a method for excitation of a rotary electric machine.

#### Description of the invention

This object is achieved with a rotary electric machine of the type described in the introduction, having the characterizing features of claim 1, an electric power plant in accordance with claim 17 and a method in accordance with claim 18.

The insulating conductor or high-voltage cable used in the present invention is flexible and is of the type described in more detail in WO 97/45919 and WO 97/45847. The insulated conductor or cable is described further in WO 97/45918, WO 97/45930 and WO 97/45931.

Thus, in the device in accordance with the invention the windings are preferably of a type corresponding to cables having solid, extruded insulation, like those currently used for power distribution, such as XLPE-cables or cables with EPR-insulation. Such a cable comprises an inner conductor composed of one or more strands, an inner semi-conducting layer surrounding the conductor, a solid insulating layer surrounding this semiconducting layer and an outer semiconducting layer surrounding the insulating layer. Such cables are flexible, which is an important property in this context since the technology for the device according to the invention is based primarily on winding systems in which the winding is formed from cables which are bent during assembly. The flexibility of a XLPE-cable normally corresponds to a radius of curvature of approximately 20 cm for a cable 30 mm in diameter, and a radius of curvature of approximately 65 cm for a cable 80 mm in

diameter. In the present application the term "flexibl " is used to indicate that the winding is flexibl down to a radius of curvature of the order of four times the cable diameter, preferably eight to twelve times the cable diameter.

- 5 The winding should be constructed to retain its properties even when it is bent and when it is subjected to thermal or mechanical stress during operation. It is vital that the layers retain their adhesion to each other in this context. The material properties of the layers are decisive here, particularly their elasticity and relative coefficients of thermal expansion. In a XLPE-cable, for instance, the insulating layer consists of cross-linked, low-density polyethylene, and the semiconducting layers consist of polyethylene with soot and metal particles mixed in. Changes in volume as a result of temperature fluctuations are completely absorbed as changes in the radius of the cable and, thanks to the comparatively slight difference between the coefficients of thermal expansion in the layers in relation to the elasticity of these materials, the radial expansion can take place without the adhesion between the layers being lost.

- The material combinations stated above should be considered only as examples. Other combinations fulfilling the conditions specified and also the condition of being semiconducting, i.e. having a resistivity within the range of  $10^{-1}$ - $10^6$  ohm-cm, e.g. 1-500 ohm-cm, or 10-200 ohm-cm, naturally also fall within the scope of the invention.

- The insulating layer may consist, for example, of a solid thermoplastic material such as low-density polyethylene (LDPE), high-density polyethylene (HDPE), polypropylene (PP), polybutylene (PB), polymethyl pentane (PMP), cross-linked materials such as cross-linked polyethylene (XLPE), or rubber such as ethylene propylene rubber (EPR) or silicon rubber.

- 30 The inner and outer semiconducting layers may be of the same basic material but with particles of conducting material such as soot or metal powder mixed in.

- The mechanical properties of these materials, particularly their coefficients of thermal expansion, are affected relatively little by whether soot or metal powder is mixed in or not - at least in the proportions required to achieve the conductivity necessary according to the invention. The insulating layer and the semiconducting layers thus have substantially the same coefficients of thermal expansion.

Ethyl ne-vinyl-acetate copolymers/nitrile rubber, butylmp polyethyl ne, ethylene-acrylate-copolymers and ethylene-ethyl-acrylate copolymers may also constitute suitable polymers for the semiconducting layers.

- 5 Even when different types of material are used as base in the various layers, it is desirable that their coefficients of thermal expansion are of the same order of magnitude. This is the case with the combination of the materials listed above.

- The materials listed above have relatively good elasticity, with an E-modulus of  
10 E<500 MPa, preferably <200 MPa. The elasticity is sufficient for any minor differences between the coefficients of thermal expansion for the materials in the layers to be absorbed in the radial direction of the elasticity so that no cracks or other damage appear and so that the layers are not released from each other. The material in the layers is elastic, and the adhesion between the layers is at least of the  
15 same magnitude as the weakest of the materials.

- The conductivity of the two semiconducting layers is sufficient to substantially equalize the potential along each layer. The conductivity of the outer semiconducting layer is sufficiently large to contain the electrical field in the cable, but sufficiently small not to give rise to significant losses due to currents induced in the  
20 longitudinal direction of the layer.

- Thus, each of the two semiconducting layers essentially constitutes one equipotential surface, and the winding with these layers will substantially enclose the  
25 electrical field within it.

There is, of course, nothing to prevent one or more additional semiconducting layers being arranged in the insulating layer.

- 30 By providing the electric machine in question with a brushless excitation system switchable between positive and negative excitation, a "maintenance free" system is obtained having rapid response and transient times at network disturbances, for instance, since the excitation system is able to generate both positive and negative field voltage and thus positive and negative field current.

- 35 According to an advantageous embodiment of the machine in accordance with the invention, the excitation system comprises two controllable antiparallel-connected current converter devices for feeding the field winding of the alternating current machine, a two-way field over-voltage protection means or discharge circuit con-

connected across the field winding, and also control equipment for controlling the current converters and over-voltage protection means or discharge circuit. This is a simple construction requiring no galvanically separated supply sources and current-limiting reactances and no separate short-circuiting devices for extinguishing  
5 conducting thyristors. The excitation system is also well suited for synchronous machines such as synchronous compensators. The present invention thus exploits the ability offered by semiconductor technology to temporarily change the polarity in a simple manner, which facilitates rapid commutation of the field current from static current converter bridge to short-circuiting circuit and vice versa when  
10 a change of current direction is required in the field circuit of the machine.

#### Brief description of the drawings

To explain the invention more clearly embodiments of the machine in accordance with the invention, selected by way of example, will now be described in more  
15 detail with reference to the accompanying drawings, in which

- Figure 1 shows the insulated cable used in the machine in accordance with the invention,  
Figure 2 shows a circuit diagram of the excitation system in the machine in accordance with the invention, and  
20 Figures 3a-f show the voltage and current variation upon bridge switching in the excitation system shown in Figure 2.

#### Description of a preferred embodiment

- 25 Figure 1 shows a cross section through an insulated conductor 11 intended for use in the windings of the machine in accordance with the present invention.

The insulated conductor 11 thus comprises a number of strands 35 having circular cross section and consisting of copper (Cu), for instance. These strands 35 are  
30 arranged in the middle of the insulated conductor 11. A first semiconducting layer 13 is arranged around the strands 35. An insulating layer 37, e.g. XLPE insulation, is arranged around the first semiconducting layer 13. A second semiconducting layer 15 is arranged around the insulating layer 37. The insulated conductor is flexible and retains this property throughout its service life. Said three layers are  
35 constructed so that they adhere to each other even when the insulated conductor is bent. The insulated conductor has a diameter within the interval 20-250 mm and a conducting area within the interval 80-3000 mm<sup>2</sup>.

Figure 2 shows a circuit diagram for the excitation system in the machine in accordance with the invention. The field winding 4 of the machine, which may be stationary or rotating, is connected to two antiparallel-connected current converter bridges 1, 2. A two-way over-voltage protection means comprising two antiparallel-connected thyristors 8, 10 with associated ignition circuits 12, 14, is also provided over the field winding 4.

The current converter bridges 1, 2 are supplied from a source 16 and controlled from a switching logic 18 via control pulse amplifiers 20, 22. A control pulse generator 28 for the current converter bridges 1, 2 in the form of thyristor bridges is also arranged to emit control pulses to the pulse amplifiers 20, 22. Measuring instruments 24, 26 are also arranged to measure the currents  $I_{FB1}$  and  $I_{FB2}$ , respectively, from the current converter bridges 1, 2, and transmit the measured results to the switching logic 18 for control purposes. Connection of the thyristors 8, 10 of the over-voltage protection means is also controlled from the switching logic 18 via the ignition circuits 12, 14. The over-voltage protection means is connected to a current-limiting resistor R. In the system with field breakers this resistor R serves as discharge resistor.

The procedure for switching from bridge 1 to bridge 2 is as follows: Initially bridge 1 is assumed to be conducting, which means that the current direction  $I_F$  through the field winding 4 is positive, see Figures 3a and 3b. The control signal  $U_{st}$ , see Figure 2, to the control pulse generator 28 and the switching logic 18 will be negative, resulting in bias reduction and thus a change of polarity of the bridge 1, see Figure 3a. The time interval for bias change,  $t_2 - t_1$  according to Figure 3b, from maximum positive peak voltage to maximum negative peak voltage is approximately 8.3 ms at a frequency of 50 Hz and 6-pulse two-way bridge.

At the time  $t_3$ , when the current  $I_{FB1}$  is still greater than 0, an ignition pulse is transmitted to the discharge thyristor 10 and a blocking signal to the bridge 1. As a result of the free-wheel effect at negative bias, a momentary transmission of excitation current  $I_{FB1}$  to the over-voltage protection circuit is obtained, and the bridge 1 becomes currentless. A signal from the measuring instrument 24 that the bridge 1 is currentless initiates unblocking of bridge 2 and blocking of the ignition circuit 14 for the thyristor 10. The time interval  $t_4 - t_3$  according to Figure 3, i.e. the period from the blocking of bridge 1 until the bridge 2 is connected is approximately 5 ms, see Figure 3. It is apparent from Figure 3d that the current  $I_F$  in the field circuit 4 during this switching interval is maintained as a result of the inductance of the field winding 4. As apparent from Figures 3d and 3, the biased



bridg 2 now forces a current  $I_R$ , see Figure 3f, through th thyristor 10 and the current-limiting resistor R, and also a current  $I_F$  through the field winding 4 of the synchronous machine. At the time  $t_5$  the field current  $I_F$  has changed polarity and the discharge thyristor 10 is extinguished through temporary biasing reduction of  
5 the bridge 2, i.e. a temporary change in polarity to force a current in the reverse direction of the short-circuiting circuit or the over-voltage protection means.

A suitable choice of current levels for generating blocking and detecting signals ensures that the time interval is brief for connecting the two-way field over-voltage  
10 protection means 8, 10, 12, 14 serving as auxiliary circuit or the two-way thyristor discharge circuit.

Switching from negative current direction to positive current direction at a positive control signal occurs in corresponding manner by temporary connection of the  
15 thyristor 8 in the over-voltage protection means.

An embodiment of the rotary electric machine in accordance with the invention is described above by way of example. However, several modifications are of course feasible within the scope of the invention. The principle described can  
20 thus be used for both stationary and rotating thyristor bridges for exciting synchronous machines or for supplying motors for drive systems. Temporary or pulsed biasing reduction may also be used to reset an activated over-voltage protection means. In a first phase, an over-voltage signal then gives a signal for alarm and resetting the protection means. A continuous error signal after a num-  
25 ber of resetting attempts will generate a tripping signal.

The introduction and use of extinguishable semiconductor elements can also shorten the time interval for switching between positive and negative excitation or vice versa. The introduction of extinguishable semiconductor elements in the two-  
30 way over-voltage protection makes temporary reversal of the field voltage unnecessary in order to extinguish an activated and conducting semiconductor element.

---

**CLAIMS**

1. A rotary electric machine of alternating current type designed to be connected directly to a distribution or transmission network and comprising at  
5 least one electric winding, **characterized** in that the winding comprises at least one electric conductor, a first layer with semiconducting properties surrounding the conductor, a solid insulating layer surrounding the first layer and a second layer with semiconducting properties surrounding the insulating layer, and also in that a brushless excitation system, switchable between positive and negative exci-  
10 tation, is arranged for excitation of the machine.
2. A machine as claimed in claim 1, **characterized** in that the potential on the first layer is substantially equal to the potential on the conductor.
- 15 3. A machine as claimed in claim 1 or claim 2, **characterized** in that the second layer is arranged to form a substantially equipotential surface surrounding the conductor.
4. A machine as claimed in claim 3, **characterized** in that the second  
20 layer is connected to a predetermined potential.
5. A machine as claimed in claim 4, **characterized** in that said predetermined potential is earth potential.
- 25 6. A machine as claimed in any of the preceding claims **characterized** in that at least two adjacent layers of the machine's winding have substantially equally large coefficients of thermal expansion.
7. A machine as claimed in any of the preceding claims **characterized** in  
30 that the conductor comprises a number of strands, at least some of which are in electric contact with each other.
8. A machine as claimed in any of the preceding claims, **characterized** in that each of said three layers is firmly joined to adjacent layers along substantially  
35 its entire contact surface.
9. A machine as claimed in any of the preceding claims, **characterized** in that said layers are arranged to adhere to each other even when the insulated conductor is bent.

10. A machine comprising at least one main electric machine of alternating current type designed to be connected directly to a distribution or transmission network and comprising at least one magnetic core and at least one electric winding, **characterized** in that the winding is formed from a cable comprising one or more current-carrying conductors, each conductor having a number of strands, an inner semiconducting layer arranged around each conductor, an insulating layer of solid insulating material arranged around said inner semiconducting layer, and an outer semiconducting layer arranged around the insulating layer, and in that a brushless excitation system, switchable between positive and negative excitation, is arranged for excitation of the machine.

11. A machine as claimed in claim 10, **characterized** in that said cable comprises a metal screen or sheath.

12. A machine as claimed in any of the preceding claims, **characterized** in that the excitation system comprises two controllable antiparallel-connected current converter devices for feeding the field winding (4) of the alternating current machine, a two-way field over-voltage protection means (8, 10, 12, 14) or discharge circuit connected across the field winding, and control equipment for controlling current converters and field over-voltage protection means or discharge circuit.

13. A machine as claimed in claim 12, **characterized** in that for switching the direction of the excitation current from the excitation system, the control equipment is arranged to change the polarity of the current converters, the control equipment causing the over-voltage protection means to be temporarily connected at transition from one to the other current direction.

14. A machine as claimed in claim 12 or claim 13 **characterized** in that the over-voltage protection means or the discharge circuit comprises a two-way thyristor discharge circuit (8, 10).

15. A machine as claimed in any of claims 12-14, **characterized** in that an activated over-voltage protection means or discharge circuit can be reset by control of conducting converter devices (1, 2) to temporary or pulse-formed change of polarity.

16. A machine as claimed in any of claims 12-14, **characterized** in that an activated over-voltage protection means or discharge circuit can be reset by means of extinguishable semiconductor elements.
- 5 17. An electric power plant, **characterized** in that it comprises a rotary electric machine as claimed in any of claims 1-16.
18. A method of exciting a rotary electric machine with both positive and negative excitation current direction, **characterized** in that a two-way field over-  
10 voltage protection means (8, 10, 12, 14) or a two-way discharge circuit is connected temporarily across the field winding (4) of the machine when switching between excitation current directions.
-



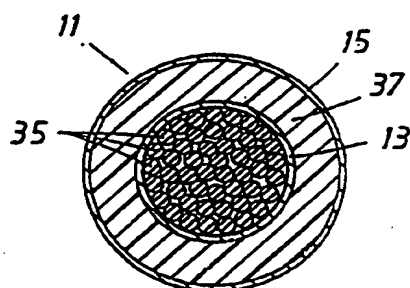


Fig. 2

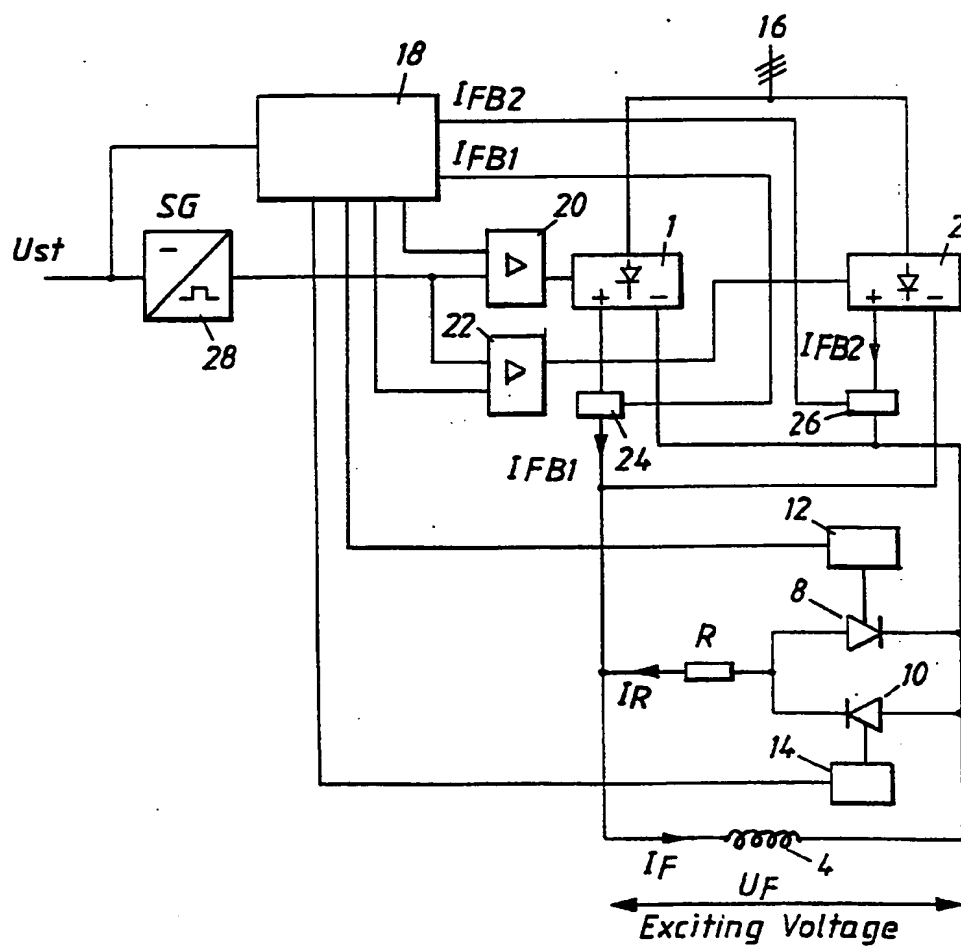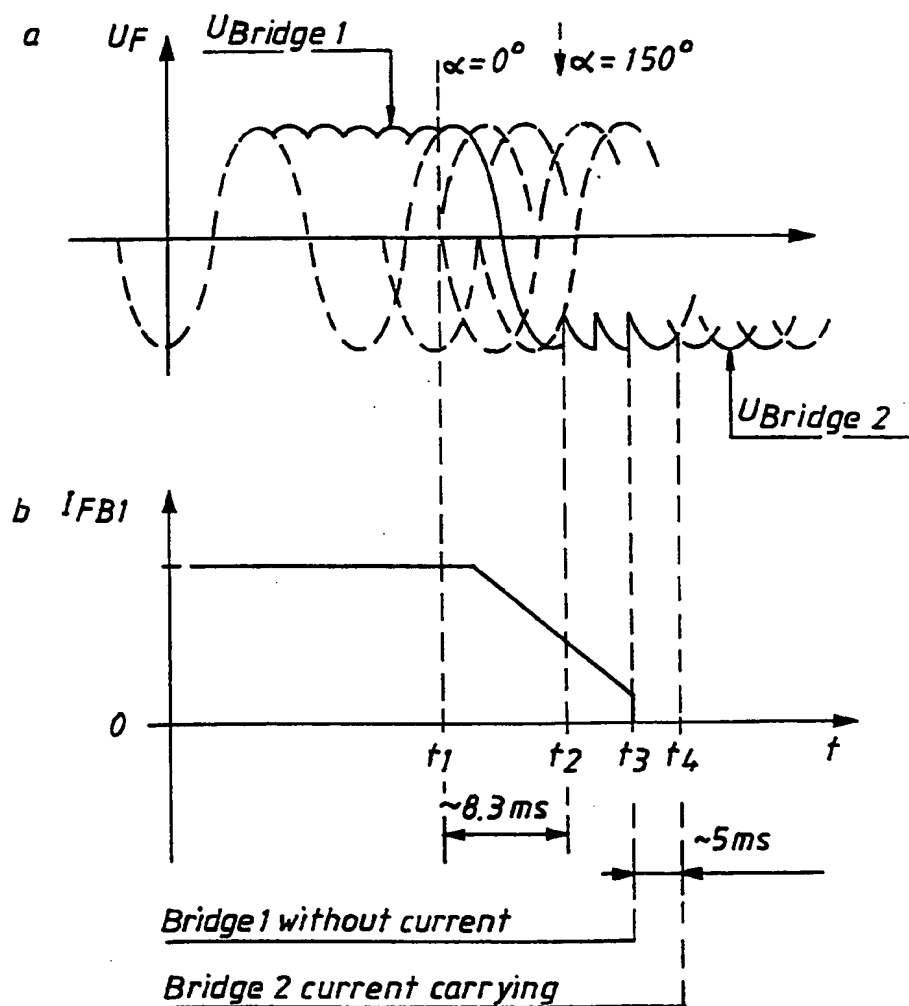

**THIS PAGE BLANK (USPTO)**

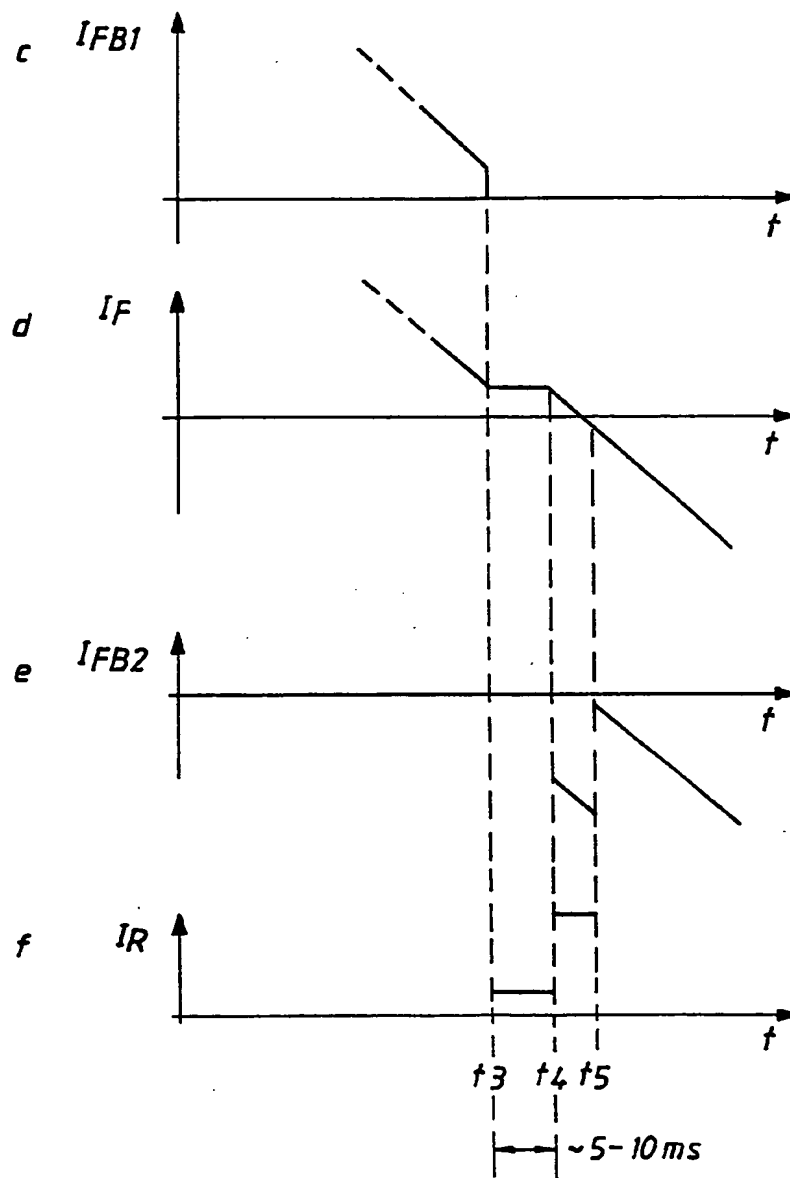
2 / 3

Fig. 3

**THIS PAGE BLANK (USPTO)**



3 / 3

Fig. 3 (contd.)

**THIS PAGE BLANK (USPTO)**

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/01741

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H02K 19/26, H02K 19/36  
According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H02K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4785138 A (O. BREITENBACK ET AL.), 15 November 1988 (15.11.88), see the whole document --	1-18
Y	US 4121148 A (H. PLATZER), 17 October 1978 (17.10.78), see the whole document --	1-18
Y	US 4106069 A (J. TRAUTNER ET AL.), 8 August 1978 (08.08.78), see the whole document --	1-18
Y	DE 3009102 A1 (PROIZVODSTVENNOE OBEDINENIE URALELEKTROTJASCHMASCH IMENI V.I. LENINA), 25 Sept 1980 (25.09.80), see the whole document --	12-18

☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document but published on or after the international filing date	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

18 December 1998

Date of mailing of the international search report

13 -01- 1999

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Lars Jakobsson  
Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**

International application No.

**PCT/SE 98/01741**

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5036165 A (R.K. ELTON ET AL.), 30 July 1991 (30.07.91), see the whole document  -- -----	1-18

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
PCT/SE 98/01741

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	4785138	A	15/11/88	DE 3543106 A,C	11/06/87
US	4121148	A	17/10/78	AT 340523 A,B	27/12/77
				DE 2714188 A,B,C	17/11/77
				FI 64871 B,C	30/09/83
				FI 771140 A	28/10/77
				FR 2349992 A,B	25/11/77
				GB 1541406 A	28/02/79
				NL 165615 B,C	17/11/80
				NL 7703629 A	31/10/77
				SE 423295 B,C	26/04/82
				SE 7704784 A	28/10/77
US	4106069	A	08/08/78	AT 265977 A	15/11/79
				AT 357216 B	25/06/80
				BR 7703213 A	08/02/78
				CA 1079349 A	10/06/80
				CH 615303 A	15/01/80
				DE 2622309 A,B,C	24/11/77
				GB 1542185 A	14/03/79
				IN 148531 A	28/03/81
				JP 1283918 C	27/09/85
				JP 52140812 A	24/11/77
				JP 60005155 B	08/02/85
				SE 430840 B,C	12/12/83
				SE 7705309 A	20/11/77
DE	3009102	A1	25/09/80	CH 653190 A,B	13/12/85
US	5036165	A	30/07/91	US 5066881 A	19/11/91
				US 5067046 A	19/11/91
				CA 1245270 A	22/11/88
				US 4853565 A	01/08/89

**THIS PAGE BLANK (USPTO)**